


Anti-Skid Leveling Pads - External Thread

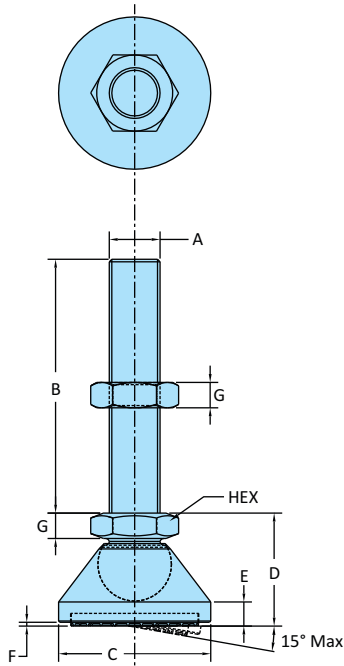

***Black Electro-Deposition Coating**

Steel Version	Model No.	Weight Kgs	Max. Capacity for Static Load	Dimensions							
				A	B	C	D	E	F	G	HEX
Material Thrust Plate : Steel Stud : Steel Nut : Steel Anti-Skid Pad : NBR Rubber SH 75 Finish : Black ED* Coating	SLPM-10100-RP	0.130	20 kN	M10	100	32	23.50	6.5	1.5	7	17
	SLPM-10150-RP	0.155	20 kN	M10	150	32	23.50	6.5	1.5	7	17
	SLPM-12100-RP	0.210	35 kN	M12	100	40	27.50	7.5	1.5	7	19
	SLPM-12150-RP	0.255	35 kN	M12	150	40	27.50	7.5	1.5	7	19
	SLPM-16100-RP	0.400	45 kN	M16	100	50	33.50	8.5	1.5	8	24
	SLPM-16200-RP	0.540	45 kN	M16	200	50	33.50	8.5	1.5	8	24
	SLPM-20100-RP	0.740	55 kN	M20	100	60	43.50	9.5	1.5	10	30
	SLPM-20200-RP	0.950	55 kN	M20	200	60	43.50	9.5	1.5	10	30
	SLPM-24100-RP	0.850	65 kN	M24	100	60	46.50	11.0	1.5	10	36
	SLPM-24200-RP	1.145	65 kN	M24	200	60	46.50	11.0	1.5	10	36

Stainless Steel Version	Model No.	Weight Kgs	Max. Capacity for Static Load	Dimensions							
				A	B	C	D	E	F	G	HEX
Material Thrust Plate : Stainless Steel-304 Stud : Stainless Steel-304 Nut : Stainless Steel-304 Anti-Skid Pad : NBR Rubber SH 75 Finish : Electro-Polished	SLPM-10100-SS-RP	0.130	20 kN	M10	100	32	23.50	6.5	1.5	7	17
	SLPM-10150-SS-RP	0.155	20 kN	M10	150	32	23.50	6.5	1.5	7	17
	SLPM-12100-SS-RP	0.210	35 kN	M12	100	40	27.50	7.5	1.5	7	19
	SLPM-12150-SS-RP	0.255	35 kN	M12	150	40	27.50	7.5	1.5	7	19
	SLPM-16100-SS-RP	0.400	45 kN	M16	100	50	33.50	8.5	1.5	8	24
	SLPM-16200-SS-RP	0.540	45 kN	M16	200	50	33.50	8.5	1.5	8	24
	SLPM-20100-SS-RP	0.740	55 kN	M20	100	60	43.50	9.5	1.5	10	30
	SLPM-20200-SS-RP	0.950	55 kN	M20	200	60	43.50	9.5	1.5	10	30
	SLPM-24100-SS-RP	0.850	65 kN	M24	100	60	46.50	11.0	1.5	10	36
	SLPM-24200-SS-RP	1.145	65 kN	M24	200	60	46.50	11.0	1.5	10	36