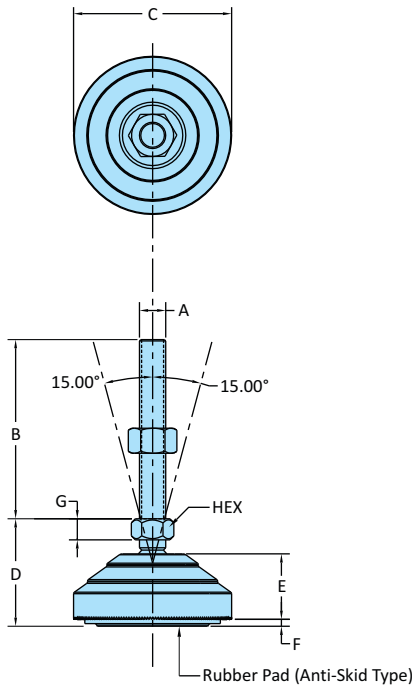


Technopolymer Plastic Base Leveling Pads
 Anti-skid (60mm Base) - External Thread


Also Available in Nickel Plated Option

| Steel Version | Model No. | Weight Kgs | Max. Capacity for Static Load | Dimensions | | | | | | | |
|--|----------------|------------|-------------------------------|------------|-----|------|------|-----|-----|----|-----|
| | | | | A | B | C | D | E | F | G | HEX |
| Material Base : Polyamide Glass Fibre reinforced Stud : Steel Anti-Skid Pad : NBR Rubber SH 75 Finish : White Zinc Plating | TPLP-8-68-60 | 0.106 | 10 kN | M8 | 68 | 60 | 41.5 | 25 | 2.5 | 8 | 14 |
| | TPLP-8-100-60 | 0.116 | 10 kN | M8 | 100 | 60 | 41.5 | 25 | 2.5 | 8 | 14 |
| | TPLP-10-68-60 | 0.120 | 10 kN | M10 | 68 | 60 | 41.5 | 25 | 2.5 | 8 | 14 |
| | TPLP-10-80-60 | 0.127 | 10 kN | M10 | 80 | 60 | 41.5 | 25 | 2.5 | 8 | 14 |
| | TPLP-10-100-60 | 0.139 | 10 kN | M10 | 100 | 60 | 41.5 | 25 | 2.5 | 8 | 14 |
| | TPLP-10-120-60 | 0.143 | 10 kN | M10 | 120 | 60 | 41.5 | 25 | 2.5 | 8 | 14 |
| | TPLP-10-180-60 | 0.179 | 10 kN | M10 | 180 | 60 | 41.5 | 25 | 2.5 | 8 | 14 |
| | TPLP-12-68-60 | 0.136 | 10 kN | M12 | 68 | 60 | 41.5 | 25 | 2.5 | 8 | 14 |
| | TPLP-12-80-60 | 0.147 | 10 kN | M12 | 80 | 60 | 41.5 | 25 | 2.5 | 8 | 14 |
| | TPLP-12-100-60 | 0.163 | 10 kN | M12 | 100 | 60 | 41.5 | 25 | 2.5 | 8 | 14 |
| | TPLP-16-68-60 | 0.179 | 10 kN | M16 | 68 | 60 | 41.5 | 25 | 2.5 | 8 | 16 |
| | TPLP-16-100-60 | 0.219 | 10 kN | M16 | 100 | 60 | 41.5 | 25 | 2.5 | 8 | 16 |
| | TPLP-16-150-60 | 0.287 | 10 kN | M16 | 150 | 60 | 41.5 | 25 | 2.5 | 8 | 16 |
| | TPLP-16-160-60 | 0.300 | 10 kN | M16 | 160 | 60 | 41.5 | 25 | 2.5 | 8 | 16 |
| | TPLP-20-100-60 | 0.308 | 10 kN | M20 | 100 | 60 | 41.5 | 25 | 2.5 | 8 | 22 |
| TPLP-20-160-60 | 0.433 | 10 kN | M20 | 160 | 60 | 41.5 | 25 | 2.5 | 8 | 22 | |

| Stainless Steel Version | Model No. | Weight Kgs | Max. Capacity for Static Load | Dimensions | | | | | | | |
|--|-------------------|------------|-------------------------------|------------|-----|----|------|------|-----|----|-----|
| | | | | A | B | C | D | E | F | G | HEX |
| Material Base : Polyamide Glass Fibre reinforced Stud : Stainless-Steel-304 Rubber Base : NBR Rubber SH 75 Finish : Electro-Polished | TPLP-8-68-60-SS | 0.109 | 10 kN | M8 | 68 | 60 | 25 | 41.5 | 2.5 | 8 | 14 |
| | TPLP-8-100-60-SS | 0.119 | 10 kN | M8 | 100 | 60 | 25 | 41.5 | 2.5 | 8 | 14 |
| | TPLP-10-68-60-SS | 0.123 | 10 kN | M10 | 68 | 60 | 25 | 41.5 | 2.5 | 8 | 14 |
| | TPLP-10-80-60-SS | 0.130 | 10 kN | M10 | 80 | 60 | 25 | 41.5 | 2.5 | 8 | 14 |
| | TPLP-10-100-60-SS | 0.142 | 10 kN | M10 | 100 | 60 | 25 | 41.5 | 2.5 | 8 | 14 |
| | TPLP-10-120-60-SS | 0.146 | 10 kN | M10 | 120 | 60 | 25 | 41.5 | 2.5 | 8 | 14 |
| | TPLP-10-180-60-SS | 0.182 | 10 kN | M10 | 180 | 60 | 25 | 41.5 | 2.5 | 8 | 14 |
| | TPLP-12-68-60-SS | 0.139 | 10 kN | M12 | 68 | 60 | 25 | 41.5 | 2.5 | 8 | 14 |
| | TPLP-12-80-60-SS | 0.150 | 10 kN | M12 | 80 | 60 | 25 | 41.5 | 2.5 | 8 | 14 |
| | TPLP-12-100-60-SS | 0.166 | 10 kN | M12 | 100 | 60 | 25 | 41.5 | 2.5 | 8 | 14 |
| | TPLP-16-68-60-SS | 0.182 | 10 kN | M16 | 68 | 60 | 25 | 41.5 | 2.5 | 8 | 16 |
| | TPLP-16-100-60-SS | 0.222 | 10 kN | M16 | 100 | 60 | 25 | 41.5 | 2.5 | 8 | 16 |
| | TPLP-16-150-60-SS | 0.290 | 10 kN | M16 | 150 | 60 | 25 | 41.5 | 2.5 | 8 | 16 |
| | TPLP-16-160-60-SS | 0.303 | 10 kN | M16 | 160 | 60 | 25 | 41.5 | 2.5 | 8 | 16 |
| | TPLP-20-100-60-SS | 0.311 | 10 kN | M20 | 100 | 60 | 25 | 41.5 | 2.5 | 8 | 22 |
| TPLP-20-160-60-SS | 0.436 | 10 kN | M20 | 160 | 60 | 25 | 41.5 | 2.5 | 8 | 22 | |